


DC Pro Lite

60-80kW



Functii

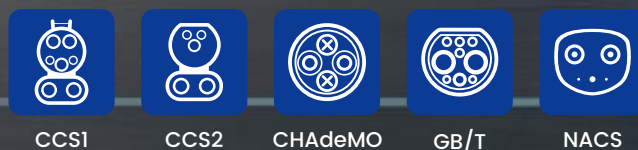

Combinatii multiple de porturi standard de incarcare

CCS2, CCS1, GB/T, CHAdeMO, NACS si Type 2 pot fi combinate si personalizate.



Gama variata de puteri

Sunt disponibile puteri intre 60 kW si 80 kW, cu posibilitate de personalizare.



Gama larga de tensiune

Tensiune iesire 150~1000 VDC, compatibila cu majoritatea vehiculelor electrice de pe piata.



Curent mare de iesire

Racirea cu aer permite un curent maxim de 250A.



Iesire eficienta

Eficienta maxima depaseste 95%.



Zgomot redus

Nivel de zgomot pana la 70 dB sau mai redus.



Protectie ridicata

Respecta nivelul de protectie IP55.



Rezistenta anticorozie ridicata

Respecta cerintele standardului anticorozie C4.



Compatibilitate protocol

Compatibil cu standardele ISO15118/DIN70121.



Echilibrare sarcina

Conectare mai eficienta la sistemul de sarcina.

Specificatii tehnice

Specificatii tehnice			
Model produs		TS-EDC60AA TS-EDC60AA/AC43	TS-EDC80AA TS-EDC80AA/AC43
Proprietati electrice			
AC Intrare	Interval tensiune intrare	trifazat 400 VAC±10%, 50/60 Hz?3P+N+PE	
	Curent nominal intrare	3F96A/159A	3F128A/191A
	Putere maxima intrare	63kW/106kW	84kW/127kW
	Sistem de impamantare	TN-C, TN-S, TN-C-S, TT	
	Factor de putere	≥0.99	
	Eficienta maxima	≥95%	
	Consum in standby	≤100W	
	Distorsiune armonica (THDi)	≤5%	
DC Iesire	Interval tensiune iesire	150-1000 VDC	
	Curent maxim iesire (sistem)	DC 200A/AC 63A	DC 250A/AC 63A
	Iesire Curent (connector)	DC 150A, 200A optional AC 32A, 63A optional	DC 150A, 200A, 250A optional AC 32A, 63A optional
	Putere maxima iesire	DC 60kW/AC 43kW	DC 80kW/AC 43kW
	Numar iesiri	2(Orice doua combinatii of CCS2, CCS1, GBT, CHAdEMO, NACS) 3(Orice trei combinatii of CCS2, CCS1, GBT, CHAdEMO, NACS, Type2)	
	Tip conector	CCS2, CCS1, GBT, CHAdEMO, NACS, Type2	
	Acuratete tensiune	≤±0.5%	
	Acuratete curent	≤±1%	
	Interfata utilizator		
Display		10.1" ecran tactil	
Contor		Contor CE	
Butoane		Buton de urgenta	
Autentificare utilizator		RFID, cod QR, aplicatie	
Limba suportata		Engleza (alte limbi la cerere)	
Comunicare			
Conexiune retea		Ethernet, WiFi	
Protocol comunicare		OCPP 1.6J, suporta upgrade la OCPP 2.0.1	

Mediu	
Interval temperatura operare	-30 C -50 C (Over 50 C derating)
Interval temperatura depozitare	-40 C -70 C
Umiditate	<95% umiditate relativa, fara condens
Altitudine	≤2000m
Zgomot	?70dB @ 3m 25? putere maxima
Mecanic	
Dimensiuni (L*A*I)	670mm*485mm*1600mm(fara management cablu)
Greutate	≤225kg
Clasificare IP si IK	IP55&IK10 (HMI IK8)
Lungime cablu incarcare	5m
Racire	Racire cu aer
Metoda instalare	Montaj la sol
Protectii	
Protectii	Protectie supratensiune, Protectie subtensiune, Protectie suprasarcina, Leakage current protection, Protectie supratemperatura, Protectie supratensiuni tranzitorii, Protectie scurtcircuit, Fault autodiagnoza, Detectie izolatie
Certification And Standards	
Certificat	CE, CB
Standarde incarcare	IEC61851-1, IEC61851-21-2, IEC61851-23, IEC61851-24, IEC 62196-1, IEC 62196-3
Standarde protocol comunicare	ISO15118-1; ISO15118-2; ISO 15118-3; DIN 70121
Optional Config	
Contor	Contor MID
Autentificare utilizator	POS
Conexiune retea	4G
Lungime cablu incarcare	6m, 7m, alte lungimi la cerere
Branding personalizat	Optiuni de branding, precum culori si stickere personalizate Contactati Teison pentru disponibilitate, pret si cantitate minima de comanda